

STRAIGHT - 45° BEND and 90° BEND QUICK COUPLERS - Female SAE/ACME Swivel Nut with Neoprene Gasket and Valve Core Depressor x 1/8" MPT
For Ball Valve Model V34900. See page A28g.

NOTE : * = Without Depressor



Typical Application
(Vacuum Gauge not included)

Model	Description
QC-S2AM	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" MPT.
QC-S4AM	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" MPT.
QC-S6AM	R12, R22 Straight Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" MPT.
QC-45E2AM	R134a 45° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" MPT.
QC-45E4AM	R12, R22 45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" MPT.
QC-45E6AM	R12, R22 45° Bend Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" MPT.
QC-E2AM	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" MPT.
QC-E4AM	R12, R22 90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" MPT.
QC-E6AM	R12, R22 90° Bend Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" MPT.




Typical Application
(Vacuum Gauge not included)

STRAIGHT - 45° BEND and 90° BEND QUICK COUPLERS - Female SAE/ACME-16 Swivel Nut with Neoprene Gasket and Valve Core Depressor x FPT
See Page 24e for Vacuum, Compound, and Pressure Gauges.

See Page 26b for HP AM, HP AAM Charging Hoses.

NOTE : * = Without Depressor

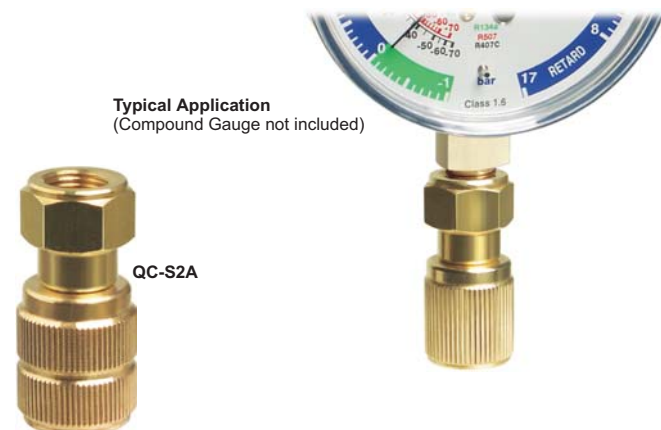

Typical Application
(Compound Gauge not included)


Model	Description
QC-S2A	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-S4A	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-S6A	R12, R22 Straight Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" FPT.
QC-45E2A	R-134a 45° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket x 1/8" FPT.
QC-45E4A	R12, R22 45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-45E6A	R12, R22 45° Bend Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" FPT.
QC-E2A	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-E4A	R12, R22 90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/8" FPT.
QC-E6A	R12, R22 90° Bend Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/8" FPT.

STRAIGHT & 90° BEND QUICK COUPLERS - Female SAE/ACME Swivel Nut with Neoprene Gasket and Valve Core Depressor x Female SAE/ACME Swivel Nut with Neoprene Gasket

For Solenoid Switch onto 1/4", 3/8" Male SAE Flare and 1/2" ACME-16 inlet port on the Vacuum Pumps. See Page 54 for VG60 Electronic Vacuum Gauge.

NOTE : * = Without Depressor

NOTE : Remove the Valve Core Depressor, if necessary, and re-install into other side with Neoprene Gasket Seal (not possible on 3/8" - 5/8" 18UNF Female SAE Swivel Nut).

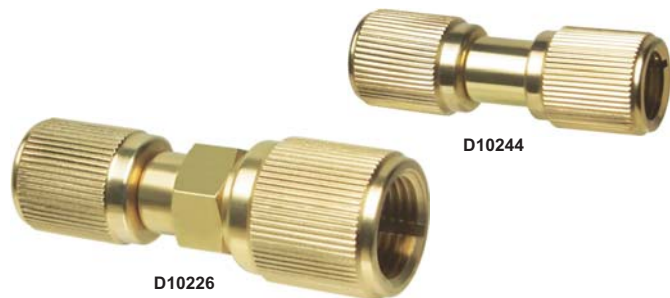

Model	Description
D10222	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D10226	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket.
D10242	R134a Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D10244	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket.
D10246	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket.
D10266	R12, R22 Straight Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket.
D102E22	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Female ACME-16 Swivel Nut with Gasket.
D102E24	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket.
D102E26	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket.
D102E44	R12, R22 90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket.
D102E46	R12, R22 90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket.
D102E66	R12, R22 90° Bend Quick Coupler 3/8"* (5/8" 18UNF) Female SAE Swivel Nut x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket.

STRAIGHT QUICK COUPLERS - Female SAE Flare Union with Copper Gasket x Female SAE/ACME Swivel Nut with Neoprene Gasket and Depressor

NOTE : * = Without Depressor



Model	Description
QC-S42	R134a Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Flare Union w/Long Tan Copper Gasket x 1/2" Female ACME-16 Swivel Nut with Gasket & Depressor.
QC-S44	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Flare Union w/Long Tan Copper Gasket x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor.
QC-S46	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Flare Union w/Long Tan Copper Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket
QC-S62	R134a Straight Quick Coupler 3/8" (5/8" 18UNF) Female SAE Flare Union with Copper Gasket x 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor.
QC-S64	R12, R22 Straight Quick Coupler 3/8" (5/8" 18UNF) Female SAE Flare Union with Copper Gasket x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor.
QC-S66	R12, R22 Straight Quick Coupler 3/8" (5/8" 18UNF) Female SAE Flare Union with Copper Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Gasket.

SPARE PARTS



Model	Description
42010-10	Neoprene Gasket for 1/4" (7/16" 20UNF) Female SAE Swivel Nut (10 pcs.).
42020-10	R134a Neoprene Gasket for 1/2" Female ACME-16 Swivel Nut (10 pcs.).
42308- 5	Neoprene Gasket for 3/8" (5/8" 18UNF) Female SAE Swivel Nut (5 pcs.).
42024-10	Depressor for 1/4" (7/16" 20UNF) Female SAE, and 1/2" Female ACME-16 Swivel Nut (10 pcs.).
A31999	Schrader Valve Core for 1/4" (7/16" 20UNF) Male SAE flare, and 1/2" ACME-16 Male Service Port.

STRAIGHT QUICK COUPLERS - Female SAE/ACME Swivel Nut with Neoprene Gasket and Valve Core Depressor x Male SAE/ACME Flare with Valve Core

NOTE : * = Without Valve Core ** = Without Depressor



Model	Description
QC-22	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.
QC-24	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-26	R134a Straight Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 3/8" (5/8" 18UNF) Male SAE Flare.
QC-42	R134a Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.
QC-44	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/4" Male SAE Flare with Valve Core.
QC-46	R12, R22 Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut w/Depressor x 3/8" (5/8" 18UNF) Male SAE Flare.
QC-62	R134a Straight Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/2" Male ACME-16 with Valve Core.
QC-64	R12, R22 Straight Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-66	R12, R22 Straight Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 3/8" (5/8" 18UNF) Male SAE Flare.

STRAIGHT ADAPTERS - Female SAE/ACME with Neoprene Gasket and Valve Core Depressor x Male SAE/ACME with Valve Core

NOTE : * = Without Valve Core



Model	Description
AD24	R134a Straight Adapter - 1/2" Female ACME-16 with Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
AD26	R134a Straight Adapter - 1/2" Female ACME-16 with Gasket and Depressor x 3/8" (5/8" 18UNF) Male SAE Flare.
AD42	R134a Straight Adapter - 1/4" (7/16" 20UNF) Female SAE with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.

45° BEND QUICK COUPLERS - Female SAE/ACME Swivel Nut with Neoprene Gasket and Valve Core Depressor x Male SAE/ACME with Valve Core

NOTE : * = Without Valve Core ** = Without Depressor



Model	Description
QC-45E22	R134a 45° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.
QC-45E24	R134a 45° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-45E26	R134a 45° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 3/8" (5/8" 18UNF) Male SAE Flare.
QC-45E42	R-134a 45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.
QC-45E44	R12, R22 45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-45E46	R12, R22 45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 3/8" (5/8" 18UNF) Male SAE Flare.
QC-45E62	R134a 45° Bend Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/2" Male ACME-16 Flare with Valve Core.
QC-45E64	R12, R22 45° Bend Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-45E66	R12, R22 45° Bend Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 3/8" (5/8" 18UNF) Male SAE Flare.

90° BEND QUICK COUPLERS - Female SAE/ACME Swivel Nut with Neoprene Gasket and Valve Core Depressor x Male SAE/ACME with Valve Core

NOTE : * = Without Valve Core ** = Without Depressor



QC-E42



Model	Description
QC-E22	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.
QC-E24	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-E26	R134a 90° Bend Quick Coupler 1/2" Female ACME-16 Swivel Nut with Gasket and Depressor x 3/8" (5/8" 18UNF) Male SAE Flare.
QC-E42	R134a 90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/2" Male ACME-16 with Valve Core.
QC-E44	R12, R22 90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-E46	R12, R22 90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Gasket and Depressor x 3/8" (5/8" 18UNF) Male SAE Flare.
QC-E62	R134a 90° Bend Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/2" Male ACME-16 with Valve Core.
QC-E64	R12, R22 90° Bend Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 1/4" (7/16" 20UNF) Male SAE Flare with Valve Core.
QC-E66	R12, R22 90° Bend Quick Coupler 3/8" (5/8" 18UNF) Female SAE Swivel Nut with Gasket x 3/8" (5/8" 18UNF) Male SAE Flare.