

STRAIGHT - 45° BEND and 90° BEND QUICK COUPLERS - Female SAE Swivel Nut with Neoprene Gasket and Valve Core Depressor x Male NPT Pipe Thread

NOTE : * = Without Depressor



Model	Description
QC-S41M	Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/16" Male NPT Pipe Thread.
QC-S4AM	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" M. NPT.
QC-S51M	5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/16" M. NPT. R410a.
QC-S5AM	5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/8" M. NPT. R410a.
QC-S6AM	3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 1/8" M. NPT.
QC-45E41M	45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/16" Male NPT Pipe Thread.
QC-45E4AM	45° 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" M. NPT.
QC-45E51M	45° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/16" M. NPT. R410a.
QC-45E5AM	45° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/8" M. NPT. R410a.
QC-45E6AM	45° 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 1/8" M. NPT.
QC-E41M	90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/16" Male NPT Pipe Thread.
QC-E4AM	90° 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" M. NPT.
QC-E51M	90° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/16" M. NPT. R410a.
QC-E5AM	90° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/8" M. NPT. R410a.
QC-E6AM	90° 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 1/8" M. NPT.

STRAIGHT, 45° BEND, and 90° BEND QUICK COUPLERS - Female SAE Swivel Nut with Neoprene Gasket and Valve Core Depressor x Female NPT Pipe Thread

NOTE : * = Without Depressor



Typical Application
(Compound Gauge not included)


Model	Description
QC-S41	Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/16" Female NPT Pipe Thread.
QC-S4A	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" F. NPT.
QC-S4B	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/4" F. NPT.
QC-S51	5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/16" F. NPT. R410a.
QC-S5A	5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" F. NPT. R410a.
QC-S5B	5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/4" F. NPT. R410a.
QC-S6A	3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 1/8" F. NPT.
QC-S6B	3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 1/4" F. NPT.
QC-45E41	45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/16" F. NPT Pipe Thread.
QC-45E4A	45° 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" F. NPT.
QC-45E51	45° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/16" F. NPT. R410a.
QC-45E5A	45° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" F. NPT. R410a.
QC-45E6A	45° 3/8"* (5/8" 18 UNF) Female SAE Swivel Nut with Neoprene Gasket x 1/8" F. NPT.
QC-E41	90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/16" F. NPT Female Pipe Thread.
QC-E4A	90° 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/8" F. NPT.
QC-E51	90° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/16" F. NPT. R410a.
QC-E5A	90° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depr. x 1/8" F. NPT. R410a.
QC-E6A	90° 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 1/8" F. NPT.

STRAIGHT & 90° BEND QUICK COUPLERS - Female SAE Swivel Nut with Neoprene Gasket and Valve Core Depressor x Female SAE Swivel Nut with Neoprene Gasket

For anti-blow back Solenoid Valves onto 1/4", 5/16" and 3/8" Male SAE Flare inlet port on the Vacuum Pumps, also an accessory for VG- 64 Electronic Vacuum Gauge...

NOTE : * = Without Depressor

NOTE : Remove the Valve Core Depressor, if necessary, and reinstall into other side with Neoprene Gasket Seal (not possible on 3/8" - 5/8" 18UNF Female SAE Swivel Nut).

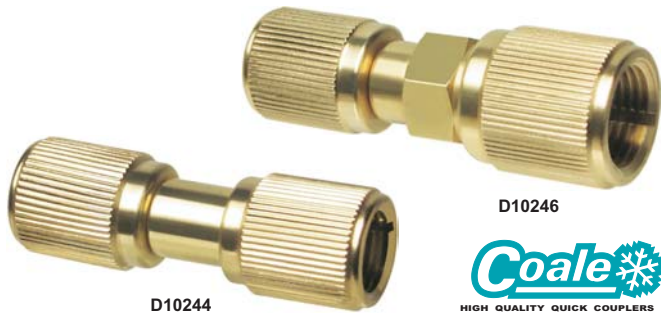

Model	Description
D10244	Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket.
D10245	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket R410a .
D10246	1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket.
D10255	5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket R410a .
D10256	5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket R410a .
D10266	3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket.

Model	Description
D102E44	90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket.
D102E45	90° 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket. R410a .
D102E46	90° 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket.
D102E55	90° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket. R410a .
D102E56	90° 5/16" (1/2" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket. R410a .
D102E66	90° 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket.

STRAIGHT QUICK COUPLERS - Female SAE Flare Union with Long Tan Copper Gasket x Female SAE Swivel Nut with Neoprene Gasket and Depressor

NOTE : * = Without Depressor



Model	Description
QC-S44	Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Flare Union with Long Tan Copper Gasket x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor.
QC-S45	1/4" (7/16" 20UNF) Female SAE Flare Union w/Long Tan Copper Gasket x 5/16" (1/2" 20UNF) Female SAE Swivel Nut w/Neoprene Gasket and Depressor. R410a .
QC-S46	1/4" (7/16" 20UNF) Female SAE Flare Union with Long Tan Copper Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket.
QC-S54	5/16" (1/2" 20UNF) Female SAE Flare Union with Long Tan Copper Gasket x 1/4" (7/16" 20UNF) Female SAE Swivel Nut w/Neoprene Gasket and Depressor. R410a .
QC-S55	5/16" (1/2" 20UNF) Female SAE Flare Union with Long Tan Copper Gasket x 5/16" (1/2" 20UNF) Female SAE Swivel Nut w/Neoprene Gasket and Depressor. R410a .
QC-S56	5/16" (1/2" 20UNF) Female SAE Flare Union with Long Tan Copper Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket. R410a .
QC-S64	3/8" (5/8" 18UNF) Female SAE Flare Union with Long Tan Copper Gasket x 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor.
QC-S65	3/8" (5/8" 18UNF) Female SAE Flare Union with Long Tan Copper Gasket x 5/16" (1/2" 20UNF) Female SAE Swivel Nut w/Neoprene Gasket and Depressor. R410a .
QC-S66	3/8" (5/8" 18UNF) Female SAE Flare Union with Long Tan Copper Gasket x 3/8"* (5/8" 18UNF) Female SAE Swivel Nut with Neoprene Gasket.

STRAIGHT QUICK COUPLERS - Female SAE Swivel Nut with Neoprene Gasket and Valve Core Depressor x Male SAE with Valve Core

For temporary installations on : Vacuum Pumps, Manifold Gauges, Hoses, Electronic Vacuum Gauges, Electronic Charging Scales, Refrigerant Recovery/Recycling Units, Refrigerant Cylinders, Oil/Dye Injectors...

- Brass body with Male SAE Port and Valve Core;
- Female SAE Swivel Nut with Neoprene Gasket and Depressor. Extended knurling, blow-off groove channels refrigerant out of the front of the nut to help prevent spray back;

NOTE : * = Without Depressor ** = Without Valve Core



QC-45



Model	Description
QC-44	Straight Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE with Valve Core.
QC-45	1/4" (7/16" 20UNF) F. SAE with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-46	1/4" (7/16" 20UNF) F. SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-54	5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) M. SAE with Valve Core. R410a.
QC-55	5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-56	5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare. R410a.
QC-64	3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 1/4" (7/16" 20UNF) M. SAE with Valve Core.
QC-65	3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-66	3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 3/8" (5/8" 18UNF) M. SAE Flare.

STRAIGHT ADAPTERS - Female SAE with Neoprene Gasket and Valve Core Depressor x Male SAE with Valve Core (except AD46 and AD56 models)

For temporary installations on Vacuum Pumps, Refrigerant Recovery and/or Recycling and/or Reclaim Units, Manifold Gauges, Electronic Charging Scales, Refrigerant Recovery / Recycling Cylinders, Nitrogen Pressure Regulator....

WARNING : When Refrigerant Recovery and/or System Evacuation operations is recommended to remove the Valve Core for shorter process time. **Do Not install the adapter without the Valve Core on under pressure systems.**

NOTE : ** = Without Valve Core



AD45

AD54



AD56

Model	Description
AD45	Straight Adapter 1/4" (7/16" 20UNF) Female SAE with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) Male SAE with Valve Core. R410a.
AD46	1/4" (7/16" 20UNF) Female SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
AD54	5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) M. SAE with Valve Core R410a.
AD56	5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare. R410a.

45° BEND QUICK COUPLERS - Female SAE Swivel Nut with Neoprene Gasket and Valve Core Depressor x Male SAE with Valve Core

For temporary installations on Service Port in operations of Evacuation / Charging / Recovery / Pressures Control on AC&R systems.

WARNING : When Refrigerant Recovery and/or System Evacuation operations is recommended to remove the Valve Core for shorter process time. **Do Not install the adapter without the Valve Core on under pressure systems.**

NOTE : * = Without Depressor ** = Without Valve Core



QC-45E54

Model	Description
QC-45E44	45° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE with Valve Core.
QC-45E45	45° 1/4" (7/16" 20UNF) F. SAE with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-45E46	45° 1/4" (7/16" 20UNF) F. SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-45E54	45° 5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) M. SAE with Valve Core. R410a.

QC-45E55	45° 5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-45E56	45° 5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare R410a.
QC-45E64	45° 3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 1/4" (7/16" 20UNF) M. SAE with Valve Core.
QC-45E65	45° 3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-45E66	45° 3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 3/8" (5/8" 18UNF) M. SAE Flare.

90° BEND QUICK COUPLERS - Female SAE Swivel Nut with Neoprene Gasket and Valve Core Depressor x Male SAE with Valve Core

For temporary installations on Service Port in operations of Evacuation / Charging / Recovery / Pressure Controls on AC&R systems.

- Brass body with Male SAE Port and Valve Core;
- Female SAE Swivel Nut with Neoprene Gasket and Depressor. Extended knurling, blow-off groove channels refrigerant out of the front of the nut to help prevent spray back;
- Easy handling in tight areas.

WARNING : When Refrigerant Recovery and/or System Evacuation operations is recommended to remove the Valve Core for shorter process time. **Do Not install the adapter without the Valve Core on under pressure systems.**

NOTE : * = Without Valve Core ** = Without Depressor



QC-E54



Model	Description
QC-E44	90° Bend Quick Coupler 1/4" (7/16" 20UNF) Female SAE Swivel Nut with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) Male SAE with Valve Core.
QC-E45	90° 1/4" (7/16" 20UNF) F. SAE with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-E46	90° 1/4" (7/16" 20UNF) F. SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare.
QC-E54	90° 5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 1/4" (7/16" 20UNF) M. SAE with Valve Core. R410a.
QC-E55	90° 5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-E56	90° 5/16" (1/2" 20UNF) F. SAE with Neoprene Gasket and Depressor x 3/8" (5/8" 18UNF) M. SAE Flare. R410a.
QC-E64	90° 3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 1/4" (7/16" 20UNF) M. SAE with Valve Core.
QC-E65	90° 3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 5/16" (1/2" 20UNF) M. SAE with Valve Core. R410a.
QC-E66	90° 3/8" (5/8" 18UNF) F. SAE with Neoprene Gasket x 3/8" (5/8" 18UNF) M. SAE Flare.

QUICK COUPLERS ACCESSORIES and SPARE PARTS



Model	Description
42010T	Teflon® Gasket - Accessory for 1/4" (7/16" 20UNF) Female SAE Swivel Nut.
42020T	5/16" (1/2" 20UNF) Female SAE Swivel Nut. R410a.
42308T	3/8" (5/8" 18UNF) Female SAE Swivel Nut.
Spare Parts	
42010	Neoprene Gasket for 1/4" (7/16" 20UNF) Female SAE.
42020	5/16" (1/2" 20UNF) Female SAE Swivel Nut. R410a.
42308	3/8" (5/8" 18UNF) Female SAE Swivel Nut.
42024	Depressor for 1/4" (7/16" 20UNF), and 5/16" (1/2" 20UNF) Female SAE Swivel Nut.
A31999	Schrader Valve Core for 1/4" (7/16" 20UNF) and 5/16" (1/2" 20UNF) Male SAE Service Ports.